


## RWAD22 CABLE TRAILING HOSE - FRAS

Softwall cable sleeving used over hoses, electrical cables etc, in industrial and mining application or for welding machines.

Designed to meet technical FRAS requirements of AS 2660.

<b>Tube:</b>	Black, NBR rubber compound
<b>Cover:</b>	Black, smooth wrapped finish CR rubber compound
<b>Reinforcement:</b>	High strength synthetic cord
<b>Temperature:</b>	-30°C to +80°C

**Branding:**

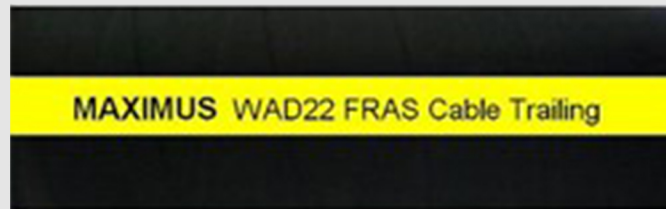

SIZE mm	ID mm	OD mm	WP psi	BP psi	Weight kg/mtr
12	12.7	23	70	210	0.38
16	15.9	27	70	210	0.45
19	19.1	29	70	210	0.52
25	25.4	35	70	210	0.63
32	32.1	42	70	210	0.85
38	38.1	48	70	210	0.99
45	44.5	55	70	210	1.22
51	50.8	61	70	210	1.39