



IT Tubo spiralato di colore blu in PVC-NBR, realizzato con spirale di rinforzo in PVC rigido antiurto incorporata. Superficie interna liscia, esterna leggermente corrugata. Molto robusto e resistente a schiacciamento, abrasione, agenti atmosferici e a numerose sostanze chimiche. Versione antistatica con cordicella di rame disponibile su richiesta (Cod. OI 02).

• Aspirazione e mandata di olii minerali, lubrificanti, carburante grezzo (nafta, diesel) e come linea di ritorno su circuiti idraulici.


EN Blue PVC-NBR hose manufactured incorporating a spiral reinforcement of anti-shock rigid PVC. Inside surface smooth, light corrugated outside. Very strong and resistant to crushing, abrasion, weathering and most chemicals. On request, it can be manufactured in the AS version with copper wire (Cod. OI 02).

• Suction and delivery of mineral oils, lubricants, crude fuel (naphta, diesel oil) and as a return line in hydraulic systems.

COD. OI 01

Ø mm 20-203

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral

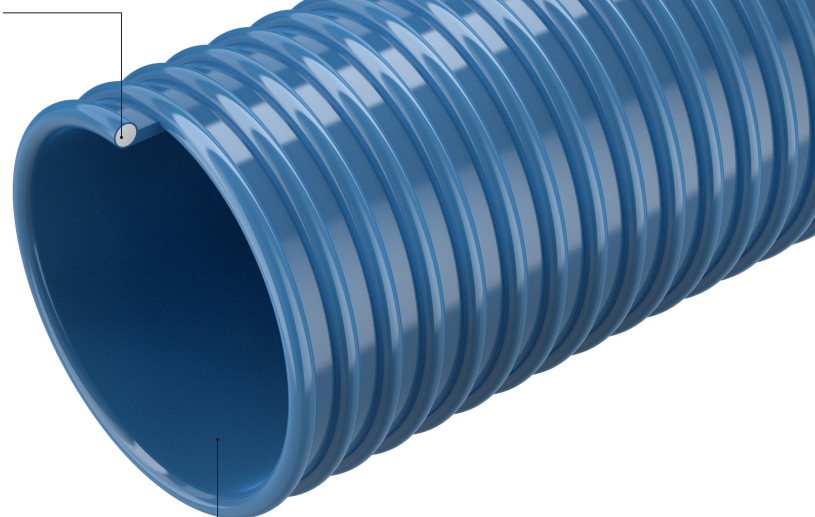

Tubo in PVC-NBR
PVC-NBR hose




SCHEDA TECNICA · TECHNICAL DATA

3,2-10,9

+60°C
-25°C

ARTICOLI DELLA STESSA SERIE
ITEMS IN THE SAME SERIES



APOLLO NL1 OIL(cod. A1 09) p.61

CODICE	Ø INT.	SPESS. MIN.	SPESS. MAX.	PESO	P.E.	P.S.	DEPR.	R. CURVATURA	LG. ROTOLO	VOLUME
CODE	Ø INT.	MIN WALL TH.	MAX WALL TH.	WEIGHT	W.P.	B.P.	VACUUM	BENDING R.	COIL LGTH.	VOLUME
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
0101020000000*	20	3,2	3,5	290	7	21	10	80	50	0,069
0101025000000*	25	3,4	3,8	390	6	18	10	100	50	0,083
01010254000000*	25,4	3,4	3,8	400	6	18	10	100	50	0,084
01010320000000*	31,8	4	4,4	590	6	18	10	130	50	0,130
01010380000000*	38,1	3,9	4,5	670	5	15	10	155	50	0,203
01010400000000*	40	3,9	4,5	700	5	15	10	160	50	0,212
01010520000000*	50,8	4,3	4,9	970	4	12	10	200	50	0,262
01010550000000*	55	4,5	5,1	1100	4	12	9	220	50	0,376
01010600000000*	60	4,7	5,4	1270	4	12	9	260	50	0,408
01010630000000*	63,5	4,8	5,5	1370	4	12	9	260	50	0,429
01010700000000*	70	4,9	5,6	1490	3	9	9	350	50	0,585
01010760000000*	76,2	5	5,7	1660	3	9	9	310	50	0,631
01010800000000*	80	5,2	6	1810	3	9	9	400	50	0,795
01010900000000*	90	5,4	6,3	2110	3	9	9	360	30	0,591
01011020000000*	102	6	7,1	2680	3	9	8,5	410	30	0,837
01011270000000*	127	6,4	7,5	3510	2,5	7,5	8	510	30	1,091
01011520000000*	152,4	7,4	8,7	4930	2	6	8	610	20	1,358
01012030000000*	203,2	10,9	12,9	10010	1,5	4,5	7	850	10	1,832

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite.

*Available on request, contact our sales office for more info and quantities.

I dati tecnici riportati sono stati misurati a 23°C e al 50% di umidità.

The technical data here reported have been measured at 23°C with 50% humidity.